


PHC·A Power Hydro Chuck

Hydro chuck with collet holder flexibility. Suitable for high precision cutting.

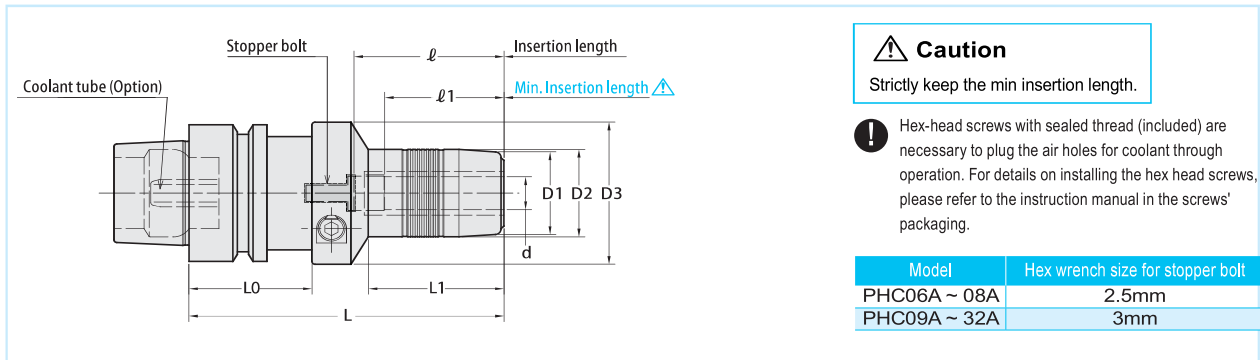

Code	Model	d	L	L1	D1	D2	D3	L0	ℓ	ℓ 1	kg	Wrench (Option)
5730 53206090	HSK40E -PHC06A -90	6	90	30	24	26	46	35	34	29	0.7	L-4T
5730 53207090	-PHC07A -90	7	90	30	26	28	46	35	34	29		
5730 53208090	-PHC08A -90	8	90	30	26	28	46	35	34	29	0.7	
5730 53209105	-PHC09A -105	9	105	44	28	30	52	35	50	40		
5730 53210105	-PHC10A -105	10	105	44	28	30	52	35	50	40	0.8	
5730 53211105	-PHC11A -105	11	105	45	30	32	52	35	50	40		
5730 53212105	-PHC12A -105	12	105	45	30	32	52	35	50	40	0.9	L-4T
5730 54206090	HSK50E -PHC06A -90	6	90	30	24	26	46	41	34	29	0.9	
5730 54207090	-PHC07A -90	7	90	30	26	28	46	41	34	29		
5730 54208090	-PHC08A -90	8	90	30	26	28	46	41	34	29	0.9	
5730 54209105	-PHC09A -105	9	105	44	28	30	52	41	50	40		
5730 54210105	-PHC10A -105	10	105	44	28	30	52	41	50	40	1.0	
5730 54211105	-PHC11A -105	11	105	45	30	32	52	41	50	40		
5730 54212105	-PHC12A -105	12	105	45	30	32	52	41	50	40	1.0	
5730 54213105	-PHC13A -105	13	105	46	34	36	52	41	50	40		
5730 54214105	-PHC14A -105	14	105	46	34	36	52	41	50	40		
5730 54215105	-PHC15A -105	15	105	46	36	38	52	41	50	40		
5730 54216105	-PHC16A -105	16	105	46	36	38	52	41	50	40	1.1	
5730 54220105	-PHC20A -105	20	105	49	40	42	46	41	50	40	1.1	

- Cutting tool shank must be within tolerances specified below ;
Shank diameter less than 6mm : Within h6 tolerance
Shank diameter 6mm and over : Within h7 tolerance
h6 or 0/-0.01 tolerance is recommended when newly making a cutting tool.
- PHC12A and PHC20A have pin holes for collet with stopper pin on its body.
- Hex-head screws (included) are necessary to plug air hole for center through coolant feed.
- For PHC03A & PHC04A, the length adjustment unit cannot be used.
- On 3mm and 4mm chuck models there may be leaking from the inner diameter slit when using center through coolant.

Ordering Example

HSK50E - PHC12A- 105


Shank size

I.D.

Projection length

PHS Collet

P. 78



Hex. wrench

P. 81

