


PHC·A Power Hydro Chuck

Hydro chuck with collet holder flexibility. Suitable for high precision cutting.

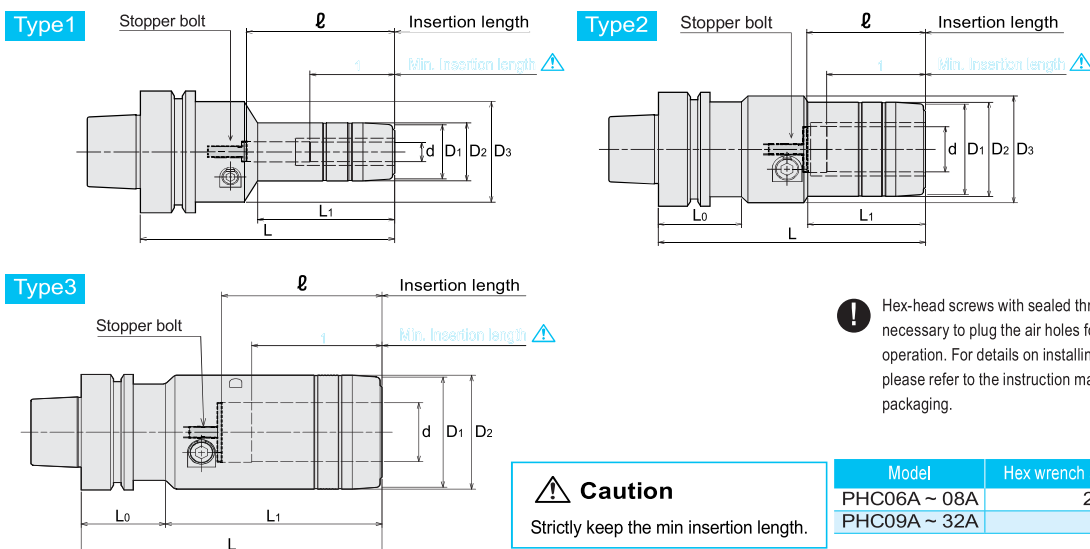

Code	Model	Type	d	L	L1	D1	D2	D3	L0	ℓ	ℓ 1	kg	Wrench (Option)
5730 65206075	HSK63F -PHC06A -75	1	6	75	30	24	26	46	—	34	29	0.9	L-4T
5730 65206120	-120	1	6	120	41	24	26	46	—	45	29		
5730 65207075	-PHC07A -75	1	7	75	30	26	28	46	—	34	29		
5730 65207120	-120	1	7	120	41	26	28	46	—	45	29		
5730 65208075	-PHC08A -75	1	8	75	30	26	28	46	—	34	29		
5730 65208120	-120	1	8	120	41	26	28	46	—	45	29		
5730 65209090	-PHC09A -90	1	9	90	44	28	30	52	—	50	40		
5730 65209120	-120	1	9	120	64	28	30	52	—	70	40		
5730 65210090	-PHC10A -90	1	10	90	44	28	30	52	—	50	40	1.1	
5730 65210120	-120	1	10	120	64	28	30	52	—	70	40		
5730 65211090	-PHC11A -90	1	11	90	45	30	32	52	—	50	40		
5730 65211120	-120	1	11	120	65	30	32	52	—	70	40		
5730 65212090	-PHC12A -90	1	12	90	45	30	32	52	—	50	40	1.1	
5730 65212120	-120	1	12	120	65	30	32	52	—	70	40	1.4	
5730 65213090	-PHC13A -90	1	13	90	46	34	36	52	—	50	40		
5730 65213120	-120	1	13	120	66	34	36	52	—	70	40		
5730 65214090	-PHC14A -90	1	14	90	46	34	36	52	—	50	40		
5730 65214120	-120	1	14	120	66	34	36	52	—	70	40		
5730 65215090	-PHC15A -90	1	15	90	46	36	38	52	—	50	40		
5730 65215120	-120	1	15	120	66	36	38	52	—	70	40		
5730 65216090	-PHC16A -90	1	16	90	46	36	38	52	—	50	40		L-6T
5730 65216120	-120	1	16	120	66	36	38	52	—	70	40		
5730 65220090	-PHC20A -90	1	20	90	49	40	42	46	—	50	40	1.2	
5730 65220120	-120	1	20	120	69	40	42	46	—	70	40	1.5	
5730 65225135	-PHC25A -135	2	25	135	59	50	52	59	42	60	50	2.3	
5730 65225150	-150	2	25	150	79	50	52	59	42	80	50	2.4	
5730 65232135	-PHC32A -135	2	32	135	42	60	62	85	42	80	65	3.0	
5730 65232150	-150	3	32	150	108	60	62	—	42	80	65	2.8	

- Cutting tool shank must be within tolerances specified below ;
Shank diameter less than 6mm : Within h6 tolerance
Shank diameter 6mm and over : Within h7 tolerance
h6 or 0/-0.01 tolerance is recommended when newly making a cutting tool.
- PHC12A and PHC20A have pin holes for collet with stopper pin on its body.
- Hex-head screws (included) are necessary to plug air hole for center through coolant feed.
- For PHC03A & PHC04A, the length adjustment unit cannot be used.
- On 3mm and 4mm chuck models there may be leaking from the inner diameter slit when using center through coolant.

Ordering Example

HSK63F - PHC12A - 120


Shank size

I.D.

Projection length

PHS Collet

P. 78



Hex. wrench

P. 81

