





SL2 Side Lock Holder

For JIS straight shank endmill with flat.

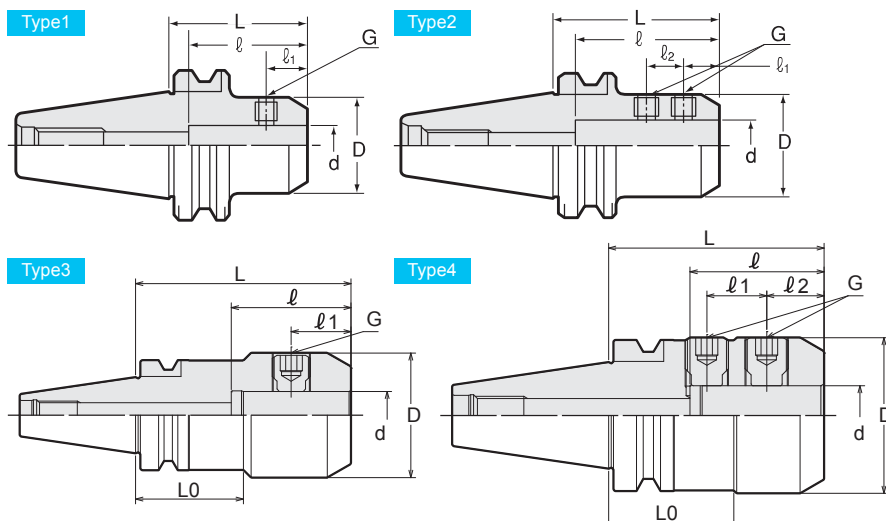

Unit : Metric

Code	Model	Type	d(H6)	D	L0	L	ℓ1	ℓ2	ℓ	G	kg
0740 02106060	BT30 -SL2 -6 -60	1	6	25	—	60	18	—	36	M6	0.5
0740 02108060	-8 -60	1	8	28	—	60	18	—	36	M8	0.8
0740 02110060	-10 -60	1	10	35	—	60	20	—	40	M10	0.7
0740 02112060	-12 -60	1	12	42	—	60	22.5	—	45	M12	0.8
0740 02116090	-16 -90	3	16	48	45	90	24	—	48	M14	1.2
0740 02120090	-20 -90	3	20	52	45	90	25	—	50	M16	1.3
0740 02306075	BT40 -SL2 -6 -75	1	6	25	—	75	18	—	36	M6	1.2
0740 02308075	-8 -75	1	8	28	—	75	18	—	36	M8	1.2
0740 02310075	-10 -75	1	10	35	—	75	20	—	40	M10	1.2
0740 02312075	-12 -75	1	12	42	—	75	22.5	—	45	M12	1.4
0740 02316075	-16 -75	1	16	48	—	75	24	—	48	M14	1.5
0740 02320075	-20 -75	1	20	52	—	75	25	—	50	M16	1.6
0740 02325090	-25 -90	4	25	65	52.3	90	24	25	56	M18	2.3
0740 02332120	-32 -120	4	32	72	45	120	24	28	60	M20	3.3
0740 02506090	BT50 -SL2 -6 -90	1	6	25	—	90	18	—	36	M6	3.7
0740 02508090	-8 -90	1	8	28	—	90	18	—	36	M8	3.7
0740 02510090	-10 -90	1	10	35	—	90	20	—	40	M10	3.8
0740 02512090	-12 -90	1	12	42	—	90	22.5	—	45	M12	4.0
0740 02516090	-16 -90	1	16	48	—	90	24	—	48	M14	4.1
0740 02520090	-20 -90	1	20	52	—	90	25	—	50	M16	4.2
0740 02525105	-25 -105	2	25	65	—	105	24	25	56	M18	4.9
0740 02532120	-32 -120	2	32	72	—	120	24	28	60	M20	5.6
0740 02540120	-40 -120	2	40	80	—	120	30	32	70	M20	5.9
0740 02542120	-42 -120	2	42	82	—	120	30	32	70	M20	6.0



Please contact NT if the cutting tool has tilted flat on the shank.
Special tool holder that matches to the tilted flat can be manufactured .
5665

Ordering Example

BT30 - SL2-6 - 60

Shank size

I.D.

Projection length