




SL2 Side Lock Holder


For JIS straight shank endmill with flat.




Type1




Type2



Type3




Type4

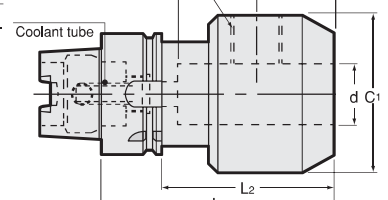

● Coolant tube is included.

Unit : Metric

Code	Model	Type	d	L1	L2	C1	C2	H1	H2	H3	G	kg
5420 13206060	HSK40A -SL2 -6 -60	1	6	60	40	25	—	18	—	36	M6	0.3
5420 13208060	-8 -60	1	8	60	40	28	—	18	—	36	M8	0.4
5420 13210060	-10 -60	4	10	60	40	35	—	20	—	40	M10	0.5
5420 13212075	-12 -75	4	12	75	55	42	—	22.5	—	45	M12	0.7
5420 13216075	-16 -75	4	16	75	55	42	—	24	—	48	M14	0.6
5420 13220075	-20 -75	4	20	75	55	42	—	25	—	50	M16	0.6
5420 14206060	HSK50A -SL2 -6 -60	1	6	60	34	25	—	18	—	36	M6	
5420 14208060	-8 -60	1	8	60	34	28	—	18	—	36	M8	
5420 14210065	-10 -65	1	10	65	39	35	—	20	—	40	M10	0.7
5420 14212075	-12 -75	1	12	75	49	42	—	22.5	—	45	M12	0.9
5420 14216075	-16 -75	1	16	75	49	42	—	24	—	48	M14	0.9
5420 14220090	-20 -90	1	20	90	64	42	—	25	—	50	M16	1.0
5420 75208080	HSK63A -SL2 -8 -80 -H	1	8	80	54	28	—	18	—	36	M8	0.9
5420 75208150	-150 -H	1	8	150	124	28	—	18	—	36	M8	1.2
5420 75210090	-10 -90 -H	1	10	90	64	35	—	20	—	40	M10	1.1
5420 75210150	-150 -H	1	10	150	124	35	—	20	—	40	M10	1.5
5420 75212095	-12 -95 -H	1	12	95	69	42	—	22.5	—	45	M12	1.3
5420 75212150	-150 -H	1	12	150	124	42	—	22.5	—	45	M12	
5420 75216100	-16 -100 -H	1	16	100	74	48	—	24	—	48	M14	1.6
5420 75216150	-150 -H	1	16	150	124	48	—	24	—	48	M14	2.2
5420 75220100	-20 -100 -H	1	20	100	74	52	—	25	—	50	M16	1.7
5420 75220150	-150 -H	1	20	150	124	52	—	25	—	50	M16	2.4
5420 77208090	HSK100A -SL2 -8 -90 -H	2	8	90	49	28	50	18	—	36	M8	2.4
5420 77208165	-165 -H	2	8	165	124	28	50	18	—	36	M8	2.7
5420 77210100	-10 -100 -H	2	10	100	59	35	50	20	—	40	M10	2.6
5420 77210165	-165 -H	2	10	165	124	35	50	20	—	40	M10	3.0
5420 77212105	-12 -105 -H	1	12	105	76	42	—	22.5	—	45	M12	2.8
5420 77212165	-165 -H	1	12	165	136	42	—	22.5	—	45	M12	3.4
5420 77216110	-16 -110 -H	1	16	110	81	48	—	24	—	48	M14	3.0
5420 77216165	-165 -H	1	16	165	136	48	—	24	—	48	M14	3.8
5420 77220110	-20 -110 -H	1	20	110	81	52	—	25	—	50	M16	3.2
5420 77220165	-165 -H	1	20	165	136	52	—	25	—	50	M16	4.0
5420 77225115	-25 -115 -H	3	25	115	86	65	—	24	25	56	M18	3.9
5420 77225165	-165 -H	3	25	165	136	65	—	24	25	56	M18	5.2
5420 77232120	-32 -120 -H	3	32	120	91	72	—	24	28	60	M20	4.4
5420 77232165	-165 -H	3	32	165	136	72	—	24	28	60	M20	5.8



HSK63A, HSK100A have manual clamp holes in the shank.

Please contact NT if the cutting tool has tilted flat on the shank.
Special tool holder that matches to the tilted flat can be manufactured.

Ordering Example

Without manual clamping hole (HSK40A, HSK50A)

HSK40A - SL2-6 - 60
Shank size I.D. Projection length

Ordering Example

With manual clamping hole (HSK63A, HSK100A)

HSK63A - SL2-8 - 80 - H
Shank size I.D. Projection length With manual clamping hole