




# SLA Side Lock Holder

For straight shank boring bar with flat and straight shank boring head with flat.

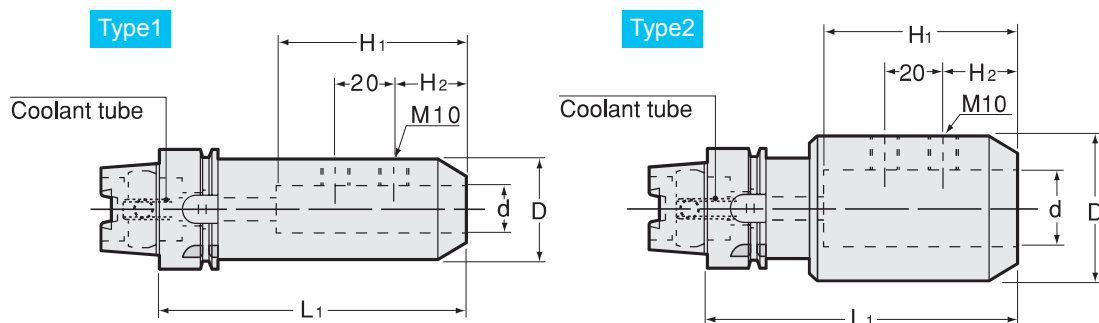


● Coolant tube is included

Unit : Metric

| Code          | Model                  | Type | d  | L1  | D  | H1 | H2 | kg  |
|---------------|------------------------|------|----|-----|----|----|----|-----|
| 5420 13116090 | HSK40A -SLA16 -90      | 2    | 16 | 90  | 40 | 65 | 25 | 0.7 |
| 5420 13120090 | -SLA20 -90             | 2    | 20 | 90  | 40 | 65 | 25 | 0.6 |
| 5420 13125105 | -SLA25 -105            | 2    | 25 | 105 | 46 | 65 | 25 | 0.9 |
| 5420 14116090 | HSK50A -SLA16 -90      | 1    | 16 | 90  | 40 | 65 | 25 | 0.9 |
| 5420 14120090 | -SLA20 -90             | 1    | 20 | 90  | 40 | 65 | 25 | 0.9 |
| 5420 14125105 | -SLA25 -105            | 2    | 25 | 105 | 46 | 65 | 25 | 1.1 |
| 5420 75120090 | HSK63A -SLA20 -90 -H   | 1    | 20 | 90  | 50 | 65 | 25 | 1.4 |
| 5420 75125105 | -SLA25 -105 -H         | 1    | 25 | 105 | 50 | 65 | 25 | 1.6 |
| 5420 75132105 | -SLA32 -105 -H         | 2    | 32 | 105 | 60 | 75 | 30 | 1.8 |
| 5420 77120105 | HSK100A -SLA20 -105 -H | 1    | 20 | 105 | 50 | 65 | 25 | 3.0 |
| 5420 77125105 | -SLA25 -105 -H         | 1    | 25 | 105 | 50 | 65 | 25 | 2.9 |
| 5420 77132120 | -SLA32 -120 -H         | 1    | 32 | 120 | 60 | 75 | 30 | 3.5 |
| 5420 77142120 | -SLA42 -120 -H         | 1    | 42 | 120 | 70 | 75 | 30 | 3.9 |

HSK63A, HSK100A have manual clamp holes in the shank.



Please contact NT if the cutting tool has tilted flat on the shank.

Special tool holder that matches to the tilted flat can be manufactured .

## Ordering Example

Without manual clamping hole (HSK40A, HSK50A)

**HSK40A - SLA16 - 90**

Shank size

I.D.

Projection length

## Ordering Example

With manual clamping hole (HSK63A, HSK100A)

**HSK63A - SLA20 - 90 - H**

Shank size

I.D.

Projection length

With manual clamping hole