




STP


Synchro Tapping Chuck

Quick-changeable tap adapter.


STP

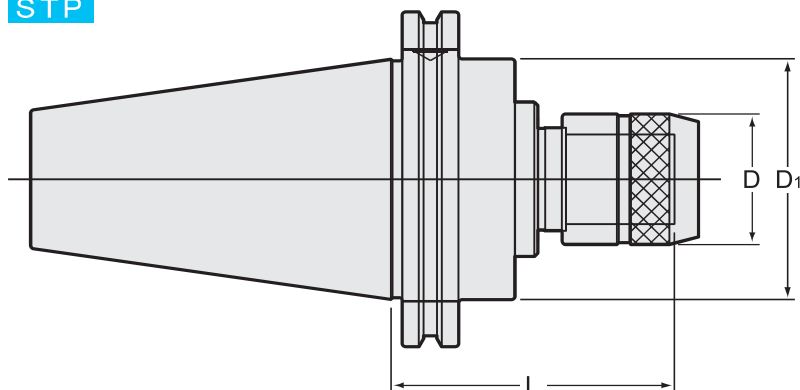


STC (Option)

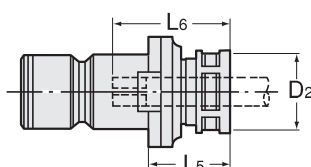

WE (Option)



WEN · B (Option)

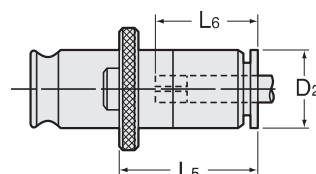

Unit : Inch

Code	Model	L	D	D1	kg	Adapter Size	L5	D2
1950 00401075	CAT40 -STP1 -75	2.953	1.496	1.750	1.2	STC1- ***	1.024	1.024
1950 00401095	-STP1 -95	3.740	1.496	1.750	1.4	WEN1B- ***	1.299	0.748
						WE1- ***	0.276	0.748
1950 00402095	-STP2 -95	3.740	2.165	1.850	1.6	STC2- ***	1.378	1.417
1950 00402115	-STP2 -115	4.528	2.165	1.750	1.9	WEN2B- ***	2.323	1.181
						WE2- ***	0.433	1.181
1950 00501110	CAT50 -STP1 -110	4.331	1.496	2.750	3.5	STC1- ***	1.024	1.024
						WEN1B- ***	1.299	0.748
						WE1- ***	0.276	0.748
1950 00502100	-STP2 -100	3.937	2.165	2.750	3.6	STC2- ***	1.378	1.417
1950 00502130	-STP2 -130	5.118	2.165	2.750	4.2	WEN2B- ***	2.323	1.181
						WE2- ***	0.433	1.181

1. STC adapter includes a collet and nut. Spanner is sold separately.
2. When ordering STC Adapter, please specify the tap shank and drive square.
3. With FDC-OH or C collet (ACC 02-03) and STC Adapter, STP can be used for center-thru coolant.

Spanner

TAP 35



STP Holder

Ordering Example

CAT40 - STP1 - 95

Shank size

Adapter size

L1

STC adapter

Ordering Example

STC1 - M10 - ANSI

Size

Tap size

ANSI,ISO,DIN,JIS

WEN·B Tap Adapter

Ordering Example

WEN1B - M10 - ANSI

Size

Tap size

ANSI,ISO,DIN,JIS