



ST・L-PHC


CNC自動旋盤用ハイドロチャック
Hydro Chuck for CNC automatic lathe

New


狭い機内での刃具交換を効率化します。

Efficient tool changing in tight machines space!

Type1

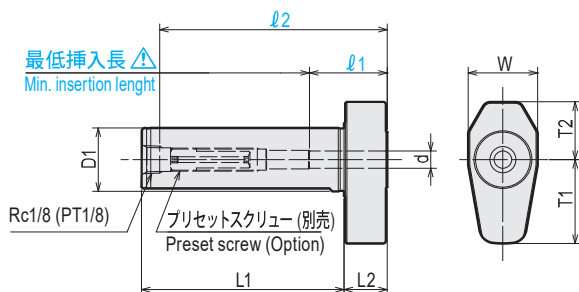

Type2

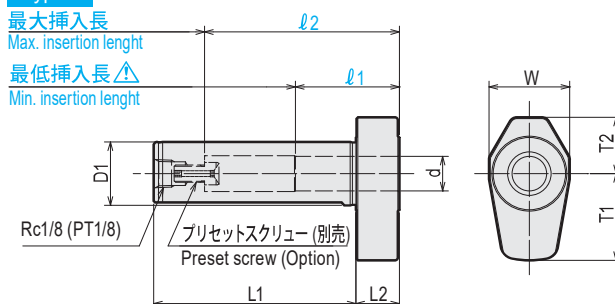

⚠ 注意：必ず、刃物シャンクを最低挿入長以上に挿入して使用してください。 ⚠ Caution : Strictly keep the min insertion length.

Code	型式 Model	Type	d	D1	L1	L2	W	T1	T2	ℓ1	ℓ2	レンチ (別売) Wrench (Option)
0470 01603050	ST16L -PHC03 -50	1	3	16	50	15	22	23	17.5	16	58	L-4T
0470 01604050	-PHC04 -50	1	4	16	50	15	22	23	17.5	19	58	
0470 01606050	-PHC06 -50	1	6	16	50	15	22	24.5	18.5	27	58	
0470 01608050	-PHC08 -50	2	8	16	50	15	24	25.5	19.5	27	47	
0470 12403060	ST19.05L -PHC03 -60	1	3	19.05	60	15	22	23	17.5	16	68	L-4T
0470 12404060	-PHC04 -60	1	4	19.05	60	15	22	23	17.5	19	68	
0470 12406060	-PHC06 -60	1	6	19.05	60	15	22	24.5	18.5	27	68	
0470 12408060	-PHC08 -60	2	8	19.05	60	15	24	25.5	19.5	27	57	
0470 12410060	-PHC10 -60	2	10	19.05	60	15	26	26.5	20.5	33	60	L-4T
0470 02003070	ST20L -PHC03 -70	1	3	20	70	15	22	23	17.5	16	78	
0470 02004070	-PHC04 -70	1	4	20	70	15	22	23	17.5	19	78	
0470 02006070	-PHC06 -70	1	6	20	70	15	22	24.5	18.5	27	78	
0470 02008070	-PHC08 -70	2	8	20	70	15	24	25.5	19.5	27	64	L-4T
0470 02010070	-PHC10 -70	2	10	20	70	15	26	26.5	20.5	33	67	
0470 02203070	ST22L -PHC03 -70	1	3	22	70	15	24	23	17.5	16	78	
0470 02204070	-PHC04 -70	1	4	22	70	15	24	23	17.5	19	78	
0470 02206070	-PHC06 -70	1	6	22	70	15	24	24.5	18.5	27	78	L-4T
0470 02208070	-PHC08 -70	2	8	22	70	15	24	25.5	19.5	27	64	
0470 02210070	-PHC10 -70	2	10	22	70	15	26	26.5	20.5	33	67	
0470 02212070	-PHC12 -70	2	12	22	70	15	28	29	21.5	36	67	
0470 02503070	ST25L -PHC03 -70	1	3	25	70	15	28	23	17.5	16	78	L-4T
0470 02504070	-PHC04 -70	1	4	25	70	15	28	23	17.5	19	78	
0470 02505070	-PHC06 -70	1	6	25	70	15	28	24.5	18.5	27	78	
0470 02506070	-PHC08 -70	2	8	25	70	15	28	25.5	19.5	27	64	
0470 02510070	-PHC10 -70	2	10	25	70	15	28	26.5	20.5	33	67	L-4T
0470 02512070	-PHC12 -70	2	12	25	70	15	28	29	21.5	36	67	
0470 13203070	ST25.4L -PHC03 -70	1	3	25.4	70	15	28	23	17.5	16	78	
0470 13204070	-PHC04 -70	1	4	25.4	70	15	28	23	17.5	19	78	
0470 13206070	-PHC06 -70	1	6	25.4	70	15	28	24.5	18.5	27	78	L-4T
0470 13208070	-PHC08 -70	2	8	25.4	70	15	28	25.5	19.5	27	64	
0470 13210070	-PHC10 -70	2	10	25.4	70	15	28	26.5	20.5	33	67	
0470 13212070	-PHC12 -70	2	12	25.4	70	15	28	29	21.5	36	67	

1. 刃物のシャンクはh6公差範囲内のシャンクを使用してください。
2. チャックを刃物台に固定してから、刃具をクランプして下さい。

1. Tool shank diameter tolerance must be within h6.
2. Secure the chuck on the fixture before clamp a cutting tool.

ご注文例 Ordering Example

ST16L - PHC03 - 50

シャンク径
Shank size

内径サイズ
I.D.

シャンク長
Shank length

レンチ
Hex. wrench
P. 119

